



外觀圖

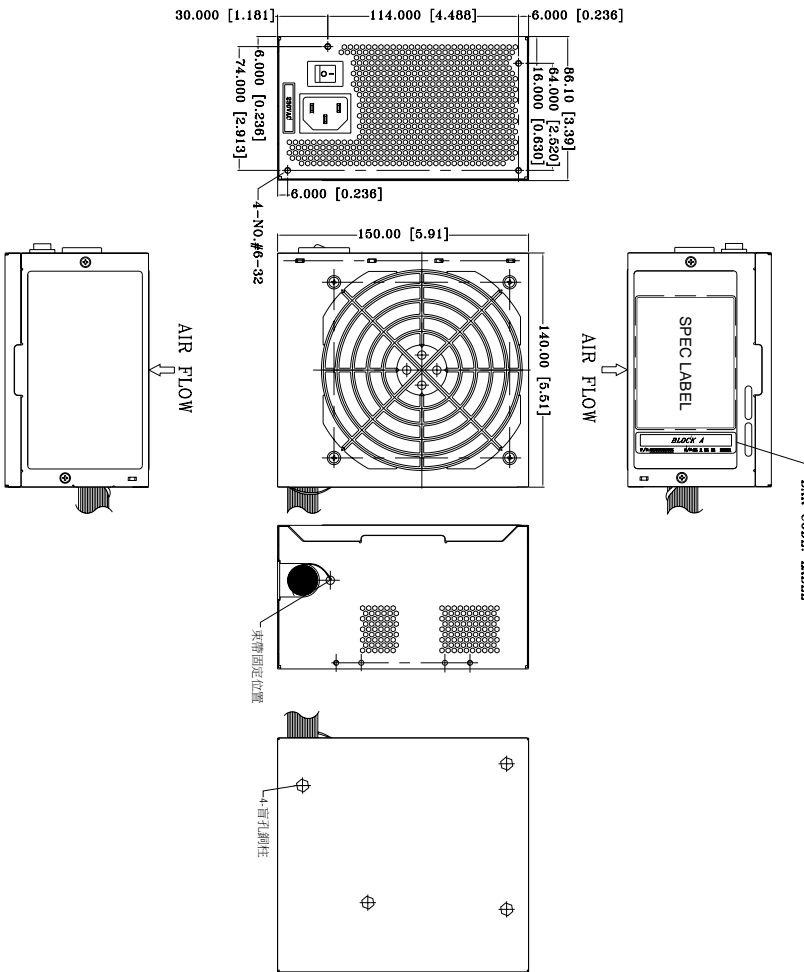

修改版次序號	修改事項	備註
1	P1由420mm改為350mm(+3.3V和COM都由22AWG改為20AWG)	
2	P2由420mm改為350mm	
3	配合CASE圖取消螺柱	

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1	1	+3.3VDC	ORANGE	20A	MOLEX 59-01-2240	350±15mm △
	2	+3.3VDC	ORANGE	20A	59-01-2240 or EQUIV.	
	3	COM	BLACK	20A		
	4	+5VDC	RED	22		
P2	1	COM	BLACK	20A	MOLEX 39-01-2040	350±15mm △
	2	COM	BLACK	20		
	3	+12V	YELLOW	20		
	4	+12V	YELLOW	20		
P3	1	COM	BLACK	22	MOLEX SD-67582-001 or EQUIV.	320±15mm
	2	+5VDC	RED	22		
	3	+5VDC	RED	22		
	4	COM	YELLOW	22		
P4	1	COM	BLACK	22	MOLEX SD-67582-001 or EQUIV.	155±15mm
	2	+5VDC	RED	22		
	3	+5VDC	RED	22		
	4	COM	YELLOW	22		
P5	1	COM	BLACK	20	MOLEX SD-67582-001 or EQUIV.	320±15mm
	2	+5VDC	RED	20		
	3	+5VDC	RED	20		
	4	COM	YELLOW	20		
P6	1	+12V	YELLOW	22	AMP 1-480424-0 or EQUIV.	155±15mm
	2	COM	BLACK	22		
	3	COM	BLACK	22		
	4	+5VDC	RED	22		
P7	1	+5VDC	RED	22	AMP 171822-4 or EQUIV.	155±15mm
	2	COM	BLACK	22		
	3	COM	BLACK	22		
	4	+12V	YELLOW	22		
P8	1	COM	BLACK	22	AMP 171822-4 or EQUIV.	155±15mm
	2	COM	BLACK	22		
	3	COM	BLACK	22		
	4	+12V	YELLOW	22		

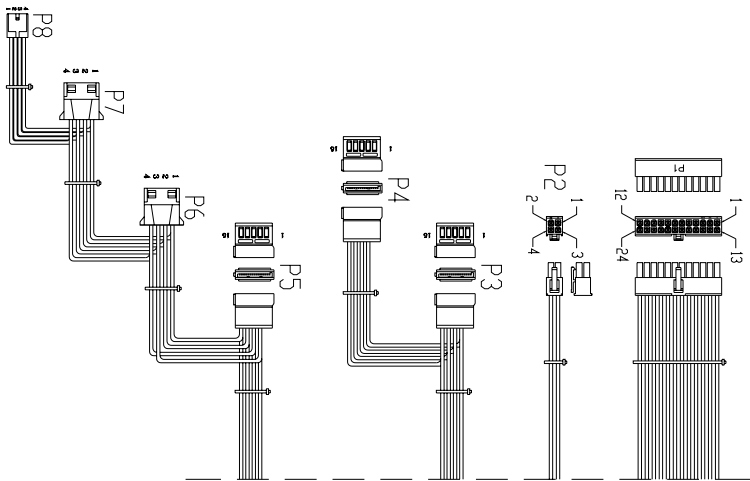

MODEL NO.: FSP200-51ACC,(STD0001)

P/N.: 9PA200AY00

MODEL NO.:	R&D 8	PE	TITLE: ASSY	DRAWN	SHEET: 1 OF 1	REV: 02	DATE
							MAY. 13. 2020

UNIT: mm [inch]

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. 產地標籤依業務指示加貼.
 3. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].
 4. +3.3V sense線插在+3.3V板孔上.