


FSP260-P35 A Series

FEATURES

- Class-I design
- IEC 62368-1 safety standard
- Form factor 3" x 5" x 1.34"
- Standby power less than 0.5W
- EN 55032 Class B emissions
- PSU remote OFF control
- Long hold up time

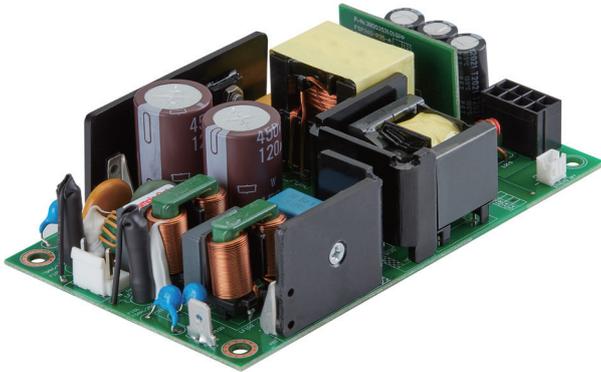

SAFETY STANDARD APPROVAL



DESCRIPTION

This AC-DC switching power supplies in a package of 3 x 5 inches is a Class-I (with Protection Earth) safety construction and feature with 0.5W low input power consumption at 0.2W load which is comply with Energy Star requirement. Less audible noise is suitable for quiet design requirement. This PSU is capable of delivering 260 watts continuous power at 18.4 CFM forced air cooling or 150 watts continuous power at convection cooling and 50°C operation temperature. Product is suitable for information, audio & video and networking applications.

INPUT SPECIFICATIONS

Input voltage:	90 to 264 VAC
Input frequency:	47-63 Hz
Input current:	3 A (rms) for 115 VAC 1.5 A (rms) for 230 VAC
Earth leakage current:	1.5 mA maxi. @ 264VAC, 63Hz
Touch current:	250 uA maxi. @ 264VAC, 63Hz
PS_OFF (CN201):	PSU build in a pull low resistor. A TTL high level to turn PSU off.

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Total output power:	260 watts maximum
Ripple and noise:	1% peak to peak maximum
Protection:	
OVP	Latch off
OCP & Shorted	Auto recovery
OTP	Latch off
Temperature coefficient:	All outputs $\pm 0.04\%$ /°C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change



ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	-20°C to +70°C
Storage temperature:	-40°C to +85°C
Relative humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50°C linearly to 50% at +70°C, applicable to convection and forced-air cooling conditions.

GENERAL SPECIFICATIONS

Power factor:	0.99 mini. @ 115VAC & 100% load 0.94 mini. @ 230VAC & 100% load
Efficiency:	Refer to rating table
Turn-On Delay Time:	≤ 1 sec at 115 VAC
Hold-up time:	25 mS mini. @ 115VAC & 260W load 50 mS mini. @ 115VAC & 150W load
Line regulation:	$\pm 0.2\%$ maximum at full load
Inrush current:	60A @ 115VAC, 25°C & cold start 120A @ 230VAC, 25°C & cold start
Withstand voltage:	3000 VAC from input to output 1500 VAC from input to ground, 1500 VAC from output to ground
Isolation resistance:	Input to output 100M ohm @ 500Vdc
MTBF:	800,000 hours mini. at full load at 25°C ambient temperature, calculated per Telcordia SR-332
EMC Performance	
EN 55032:	Class B conducted, class B radiated
FCC:	Class B conducted, class B radiated
VCCI:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A and D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 2 KV diff., ± 4 KV com.
EN61000-4-6:	Conducted immunity, 3 V/m
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity & voltage interruptions 30% reduction for 500 ms >95% reduction for 10 mS 100% reduction for 5000 ms

OUTPUT POWER DERATING CURVE

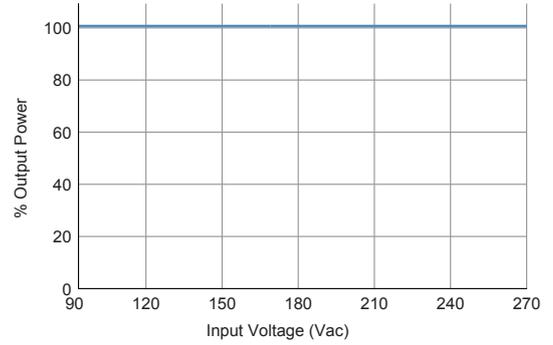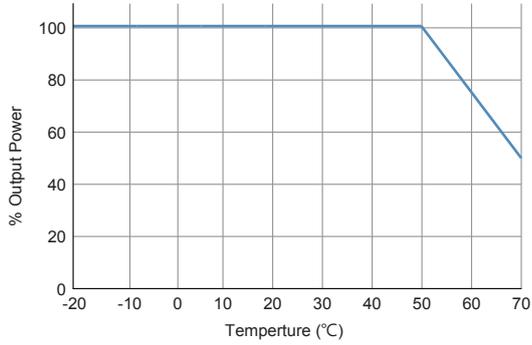


OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output							Efficiency (typical) @ 115 / 230 VAC	
	V1	Min. Current	Max. Current ⁽¹⁾		Tol.	Ripple & Noise ⁽²⁾	Max. Power ⁽¹⁾		
			Convection	Forced air			Convection		Forced air
FSP260-P35-A12	12 V	0 A	12.50A	21.60A	±3 %	120 mV	150W	260W	90 / 92%
FSP260-P35-A24	24 V	0 A	6.25A	10.80A	±3 %	240 mV	150W	260W	91 / 92%
FSP260-P35-A54	54 V	0 A	2.78A	4.82A	±3 %	540 mV	150W	260W	92 / 94%

NOTES:

1. Forced air 18.4 CFM to be provide by user.
2. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 μF tantalum (or electrolytic) capacitor in parallel with a 0.1 μF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

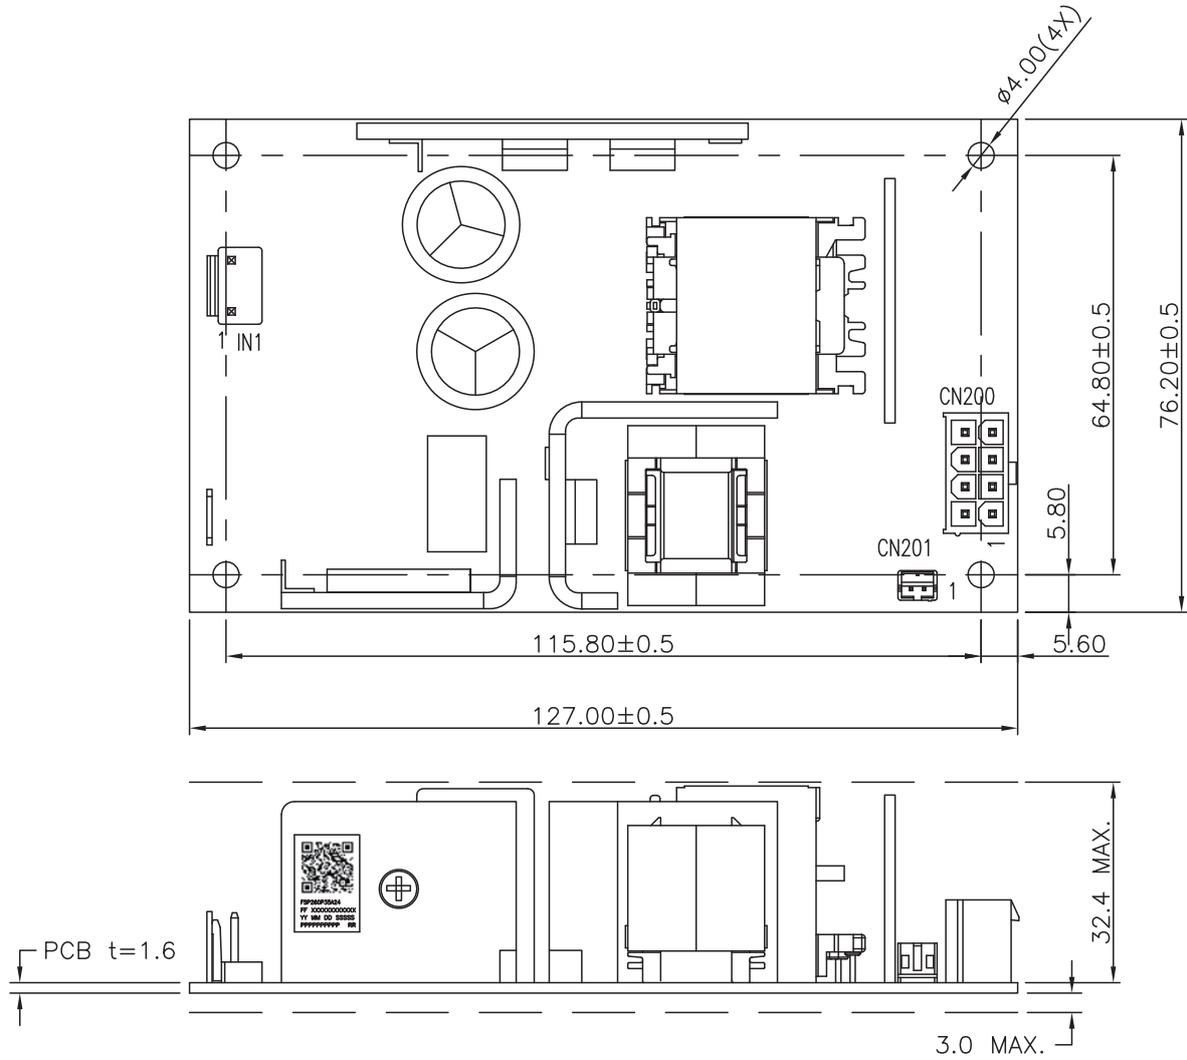

CONNECTOR PIN CHART

CONNECTOR	IN1			CN200								CN201	
PIN NO.	1	2	3	1	2	3	4	5	6	7	8	1	2
OUTPUT	Line	N.C.	Neutral	+Vout				Return				PS_OFF +	PS_OFF -

NOTES:

- Dimensions shown in mm
- Connector IN1: JST B2P3-VH or equivalent.
- Connector CN200: Molex 462071208 or equivalent.
- Connector CN201: JST B2B-PH
- Ground tab : 8 x 6.35 x 0.8 mm
- To ensure compliance with level B emissions, connect the two PCB mounting holes with metallic standoffs to the chassis.

Weight: 280 grams (0.617 lbs.) approx.