



FSP300-PBA Series

FEATURES

- Class-I Design
- IEC 62368-1 safety standard
- EN55032 Class B emission
- Remote Off input (PS_Off)
- Standby power less than 0.5W
- Peak power 450W

SAFETY STANDARD APPROVAL



DESCRIPTION

This AC-DC switching power supplies in a package of 170 x 115 x 39.9 mm is a Class-I (with Protection Earth) safety construction. This PSU is capable of delivering 300 watts continuous power and 450 watts peak power (except 12V at 400 watts) at 50°C operation temperature. Product is suitable for industry control applications.

INPUT SPECIFICATIONS

Input voltage: 100 to 240 VAC
 Input frequency: 47.5 to 63 Hz
 Input current: 5 A (rms) for 115 VAC
 2.5 A (rms) for 230 VAC
 Earth leakage current: 750 μ Amax. @ 264 VAC, 63 Hz
 PS Off: PSU is normally ON until a High-level signal is input.



OUTPUT SPECIFICATIONS

Output voltage adjustment: $\pm 1V$
 Total output power: 300watts maximum
 Ripple and noise: 240mV peak to peak maximum
 Protection:
 OVP: Auto recovery
 OCP & Shorted: Auto recovery
 OTP: Auto recovery

ENVIRONMENTAL SPECIFICATIONS

Operating temperature: -20°C to +70°C
 Storage temperature: -40°C to +85°C
 Relative humidity: 10% to 95% non-condensing
 Derating: See derating curve


GENERAL SPECIFICATIONS

Fuse protection: 6.3 A , 250 VAC
 Operating altitude : 5000 meters above sea level
 Efficiency: Refer to rating table
 Turn-On Delay Time ≤ 2 sec at 100% load
 Hold-up time: 16 mS minimum @ 115 VAC & 100% load
 Line regulation: $\pm 1\%$ maximum at full load
 Inrush current: 25 A @ 115 VAC / 60 Hz, at 25°C cold start
 50 A @ 230VAC / 50 Hz, at 25°C cold start
 Power factor: ≥ 0.99 @ 115 VAC, ≥ 0.99 @ 230 VAC
 Withstand voltage: 3000 VAC from input to output
 2000VAC from input to ground,
 1500 VAC from output to ground
 Isolation resistance: Input to output 100M ohm @ 500Vdc
 MTBF: 850K hours mini. at full load at 25°C ambient temperature, calculated per Telcordia SR-332


EMC Performance

EN55032: Class B conducted, class B radiated
 EN61000-3-2: Harmonic distortion, class A and D
 EN61000-3-3: Line flicker
 EN61000-4-2: ESD, ± 8 KV air and ± 4 KV contact
 EN61000-4-3: Radiated, Radio Frequency, Electromagnetic field (RS): 3 V/m
 EN61000-4-4: Fast transient/burst, ± 1 KV
 EN61000-4-5: Surge, ± 2 KV diff., ± 4 KV com.
 EN61000-4-6: Conducted Radio Frequency Disturbances (CS), 3 Vrms
 EN61000-4-8: Power Frequency Magnetic field, 3 A/m
 EN61000-4-11: Voltage dip immunity & voltage interruptions
 30% reduction for 500mS, criteria A
 >95% reduction for 10mS, criteria A
 >95% reduction for 5000mS, criteria B

INPUT VOLTAGE DERATING CURVE

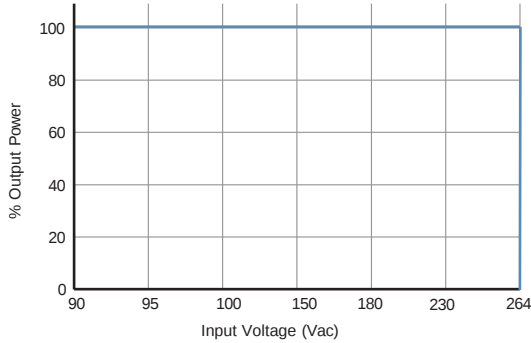

OUTPUT POWER DERATING CURVE

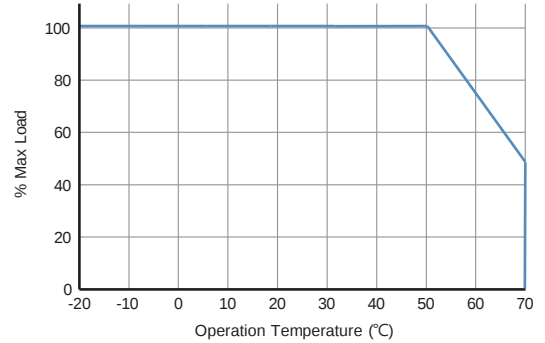

OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output							Efficiency (typical)
	V1	Min. Current	Max. Current	Tolerance	Ripple & Noise ⁽¹⁾	Max. Power	Peak Power ⁽²⁾	@ 115 / 230 Vac
FSP300-PBA-A12	12 V	0A	25 A	±3 %	120 mV	300W	400W	85 / 88%
FSP300-PBA-A24	24 V	0A	12.5 A	±3 %	240 mV	300W	450W	87 / 90%
FSP300-PBA-A48	48 V	0A	6.25 A	±3 %	480 mV	300W	450W	87 / 90%

NOTES:

1. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 22 μ F capacitor in parallel with a 0.1 μ F ceramic capacitor across the output.
2. Refer to Fig. 1 and Fig. 2 for peak power definition.

FIG 1. PEAK OUTPUT POWER


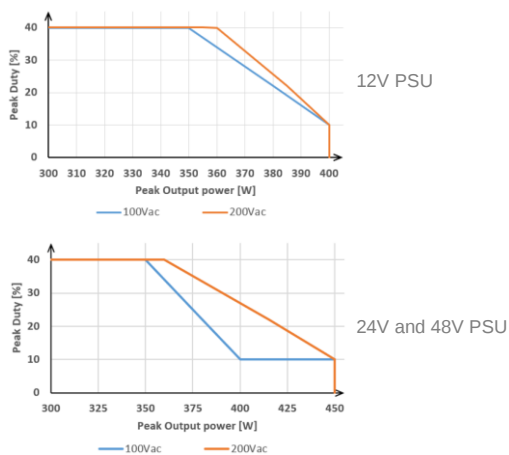



FIG 2. DESCRIPTION OF PEAK CURRENT

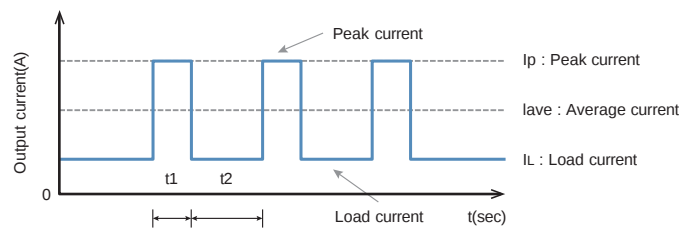

Definitions:

- Peak output power [W] = Peak current [A] * Output voltage [V]
- $t1 \leq 5 \text{ sec}$
- $I_p \leq \text{Rated peak current}$
- Duty = $t1/(t1+t2) \times 100[\%] \leq 40\%$
- $I_{ave} = (I_p \times t1 + I_L \times t2)/(t1+t2) \leq \text{Rated current}$

MECHANICAL SPECIFICATIONS

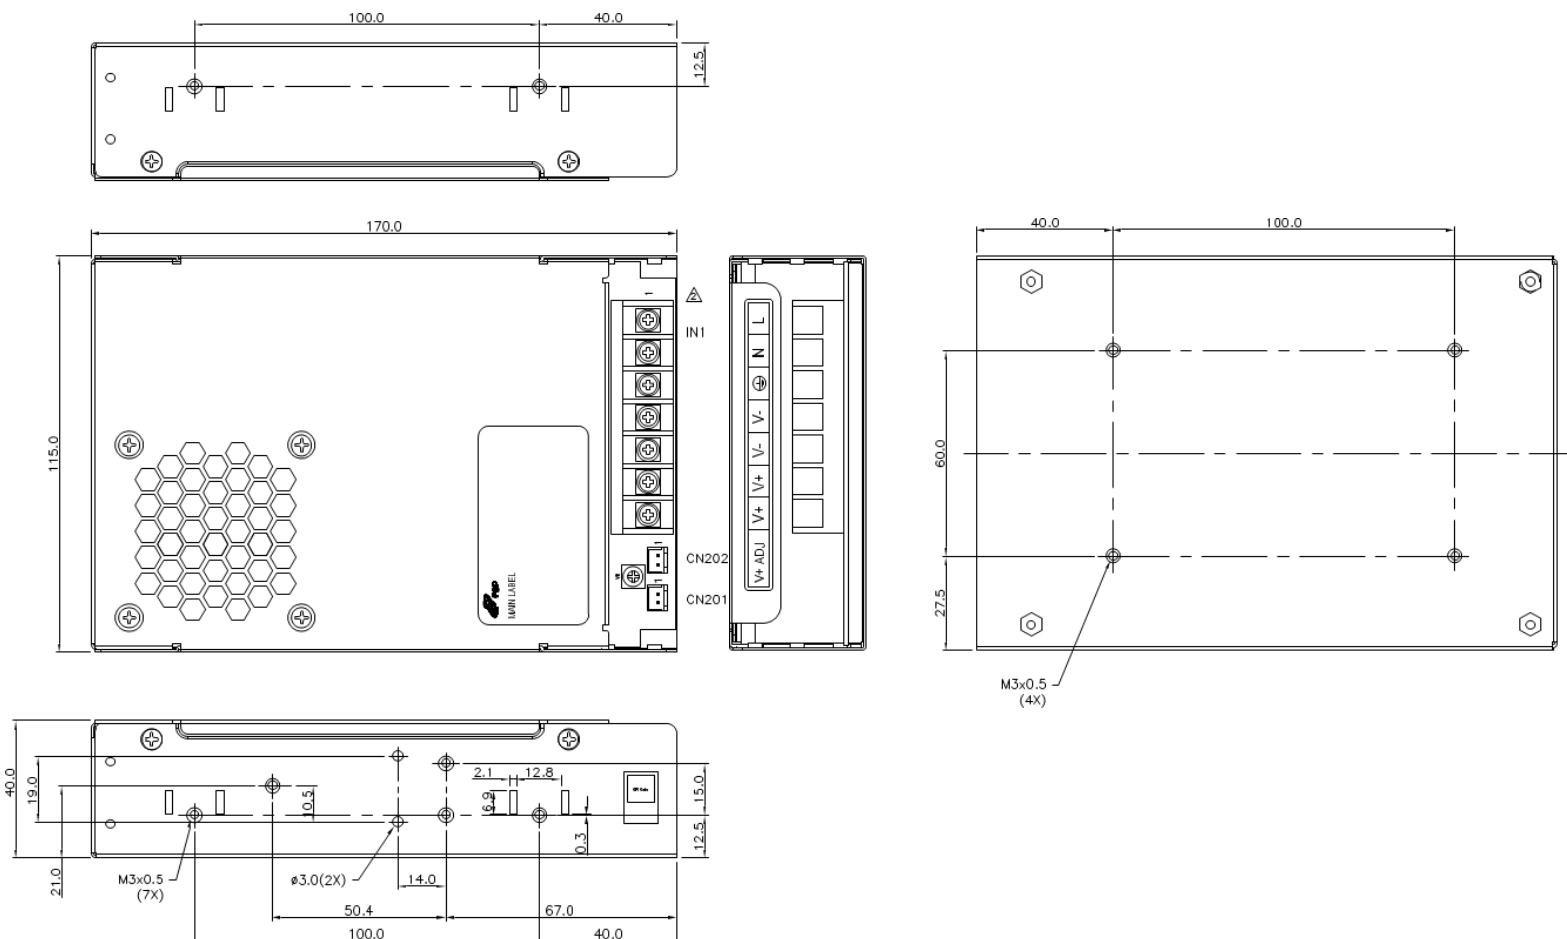

Pin assignment of IN1

Pin No.	Function	Wafer
1	AC/L	DINKLE DT-49-C91W-07 or EQUIVALENT
2	AC/N	
3	FG	
4	V-	
5	V-	
6	V+	
7	V+	

Pin assignment of CN201

Pin No.	Function	Wafer
1	PS_OFF	JST B2B-XH-A or EQUIVALENT
2	PS_OFF RTN	

Pin assignment of CN202

Pin No.	Function	Wafer
1	Power Good	JST B2B-XH-A or EQUIVALENT
2	Power Good RTN	

NOTES:

1. Dimension showed in mm.
2. Weight: Enclosed form factor 780 grams (1.72 lbs.) approx.