

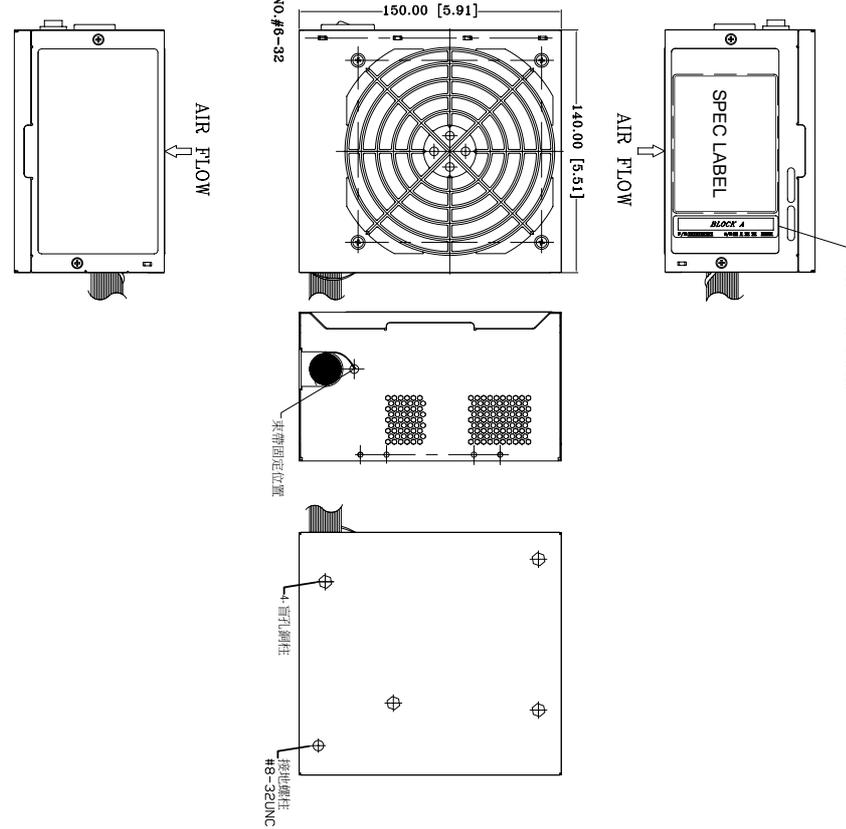


# 外觀圖

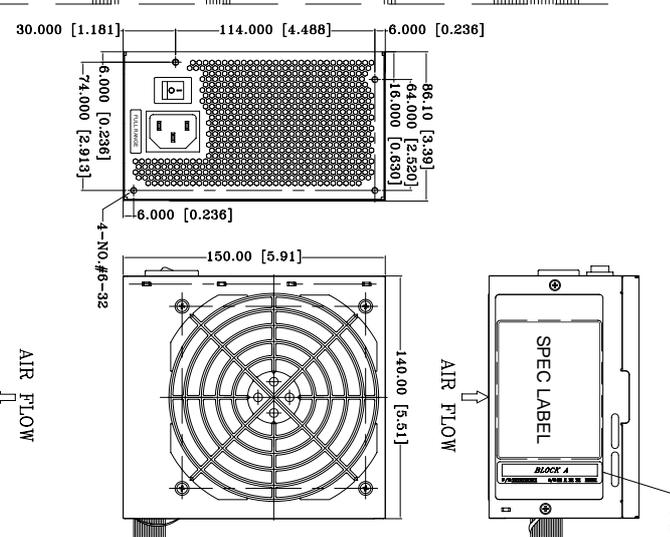

REF. ID.	PN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH				
P1	1	+3.3VDC	ORANGE	20	MOLEX	400±8mm				
	2	+3.3VDC	ORANGE	20	39-01-2240					
	3	COM	BLACK	18	or EQUIV.					
	4	+5VDC	RED	20						
	5	+5VDC	RED	20						
	6	+5VDC	RED	20						
	7	COM	BLACK	18						
	8	PW_OK	GRAY	24						
P2	1	+12V	YELLOW	18		500±8mm				
	2	COM	BLACK	18	WST					
	3	+12V	YELLOW	18	P4-142002BK-3B+					
	4	+12V	YELLOW	18	P4-142002BK-4B					
	5	COM	BLACK	20	or EQUIV.					
	6	COM	BLACK	20						
	7	+12V	YELLOW	20						
	8	+12V	YELLOW	20						
	9	COM	BLACK	18						
	10	+5VDC	RED	20						
	11	+5VDC	RED	20						
	P3	1	+5VDC	RED	20		MOLEX	400±8mm		
2		+5VDC	RED	20	SD-67926-0311					
3		COM	BLACK	20	or EQUIV.					
4		+12V	YELLOW	20						
5		+12V	YELLOW	20						
P4		1	COM	BLACK	20	MOLEX	155±10mm			
		2	+5VDC	RED	20	SD-67926-0311				
		3	+5VDC	RED	20	or EQUIV.				
		4	COM	BLACK	20					
		5	+12V	YELLOW	20					
		P5	1	+12V	YELLOW	20			AMP	400±8mm
			2	COM	BLACK	20			1-480424-0	
	3		COM	BLACK	20	or EQUIV.				
	4		+5VDC	RED	20	AMP				
	5		+12V	YELLOW	20	AMP				
	P6		1	+5VDC	RED	20		AMP	155±10mm	
			2	+5VDC	RED	20		AMP		
3			COM	BLACK	20	AMP				
4			+12V	YELLOW	20	AMP				
5			+5VDC	RED	20	AMP				
P7			1	+12V	YELLOW	20	WST	400±8mm		
			2	+12V	YELLOW	20	P8-142002K21B-B			
		3	+12V	YELLOW	20	or EQUIV.				
		4	COM	BLACK	20					
		5	COM	BLACK	20					
		P8	1	+5VDC	RED	20	AMP			155±10mm
			2	+5VDC	RED	20	AMP			
	3		COM	BLACK	20	AMP				
	4		+12V	YELLOW	20	AMP				
	5		+5VDC	RED	20	AMP				
	P9		1	+5VDC	RED	20	AMP		155±10mm	
			2	+5VDC	RED	20	AMP			
3			COM	BLACK	20	AMP				
4			+12V	YELLOW	20	AMP				
5			+5VDC	RED	20	AMP				
P10			1	+12V	YELLOW	20	WST	400±8mm		
			2	+12V	YELLOW	20	P8-142002K21B-B			
		3	+12V	YELLOW	20	or EQUIV.				
		4	COM	BLACK	20					
		5	COM	BLACK	20					
		P11	1	+5VDC	RED	20	AMP			155±10mm
			2	+5VDC	RED	20	AMP			
	3		COM	BLACK	20	AMP				
	4		+12V	YELLOW	20	AMP				
	5		+5VDC	RED	20	AMP				
	P12		1	+12V	YELLOW	20	WST		400±8mm	
			2	+12V	YELLOW	20	P8-142002K21B-B			
3			+12V	YELLOW	20	or EQUIV.				
4			COM	BLACK	20					
5			COM	BLACK	20					
P13			1	+5VDC	RED	20	AMP	155±10mm		
			2	+5VDC	RED	20	AMP			
		3	COM	BLACK	20	AMP				
		4	+12V	YELLOW	20	AMP				
		5	+5VDC	RED	20	AMP				
		P14	1	+12V	YELLOW	20	WST			400±8mm
			2	+12V	YELLOW	20	P8-142002K21B-B			
	3		+12V	YELLOW	20	or EQUIV.				
	4		COM	BLACK	20					
	5		COM	BLACK	20					
	P15		1	+5VDC	RED	20	AMP		155±10mm	
			2	+5VDC	RED	20	AMP			
3			COM	BLACK	20	AMP				
4			+12V	YELLOW	20	AMP				
5			+5VDC	RED	20	AMP				
P16			1	+12V	YELLOW	20	WST	400±8mm		
			2	+12V	YELLOW	20	P8-142002K21B-B			
		3	+12V	YELLOW	20	or EQUIV.				
		4	COM	BLACK	20					
		5	COM	BLACK	20					
		P17	1	+5VDC	RED	20	AMP			155±10mm
			2	+5VDC	RED	20	AMP			
	3		COM	BLACK	20	AMP				
	4		+12V	YELLOW	20	AMP				
	5		+5VDC	RED	20	AMP				
	P18		1	+12V	YELLOW	20	WST		400±8mm	
			2	+12V	YELLOW	20	P8-142002K21B-B			
3			+12V	YELLOW	20	or EQUIV.				
4			COM	BLACK	20					
5			COM	BLACK	20					
P19			1	+5VDC	RED	20	AMP	155±10mm		
			2	+5VDC	RED	20	AMP			
		3	COM	BLACK	20	AMP				
		4	+12V	YELLOW	20	AMP				
		5	+5VDC	RED	20	AMP				
		P20	1	+12V	YELLOW	20	WST			400±8mm
			2	+12V	YELLOW	20	P8-142002K21B-B			
	3		+12V	YELLOW	20	or EQUIV.				
	4		COM	BLACK	20					
	5		COM	BLACK	20					

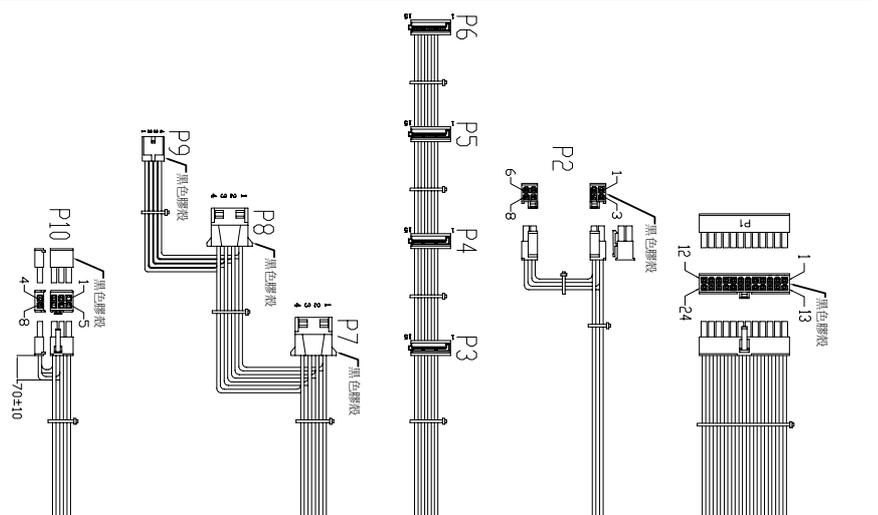

修改版次	字號	修改事項	備註
△	1	配合線材圖修改外觀圖	

- NOTES:
- ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
  - 產地標籤依業務指示加貼.
  - 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].
  - +3.3V sense線插在+3.3V板孔上.

P/N.:9PA400CT00

MODEL NO. :FSP400-50AAC,(STD0001)	TITLE:ASSY	SHEET: 1 OF 1	REV:05
R&D 8	PE	DRAWN	DATE
			OCT.08.2018

UNIT:mm [inch]