
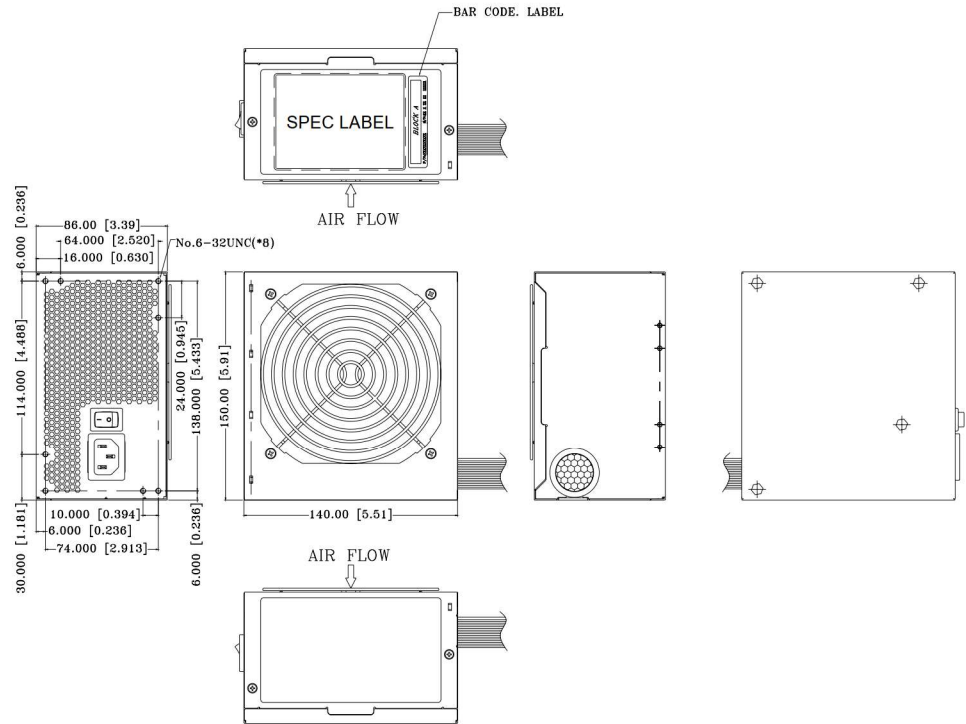


REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH		
P1 /24	1	+3.3VDC	ORANGE	18	WST P20-I42002K11D-B +P4-I42002K11D-B or EQUIV.	550 ⁺³⁰ ₋₁₀ mm		
	2	+3.3VDC	ORANGE	18				
	3	COM	BLACK	18				
	4	+5VDC	RED	18				
	5	COM	BLACK	18				
	6	+5VDC	RED	18				
	7	COM	BLACK	18				
	8	PW_OK	GRAY	24				
	9	+5Vsb	PURPLE	20				
	10	+12V	YELLOW	18				
	11	+12V	YELLOW	18				
	12	+3.3VDC	ORANGE	18				
	13	+3.3VDC	ORANGE	18				
	14	+3.3V _{sense}	BROWN	24				
	15	-12VDC	BLUE	24				
	16	COM	BLACK	18				
	17	PS_ON#	GREEN	24				
	18	COM	BLACK	18				
	19	COM	BLACK	18				
	20							
	21	+5VDC	RED	18				
	22	+5VDC	RED	18				
	23	+5V _{sense}	RED	24				
	24	+5VDC	RED	18				
P2	1	COM	BLACK	18	MOLEX 39-01-2080 or EQUIV.	600 ⁺³⁰ ₋₁₀ mm		
	2	COM	BLACK	18				
	3	COM	BLACK	18				
	4	COM	BLACK	18				
	5	+12V	YELLOW	18				
	6	+12V	YELLOW	18				
	7	+12V	YELLOW	18				
	8	+12V	YELLOW	18				
P3	1	COM	BLACK	20	WST P4-I42002BK3B + P4-I42002BK4B or EQUIV.	150±10mm		
	2	COM	BLACK	20				
	3	COM	BLACK	20				
	4	COM	BLACK	20				
	5	+12V	YELLOW	20				
	6	+12V	YELLOW	20				
	7	+12V	YELLOW	20				
	8	+12V	YELLOW	20				
P4	1	+12V	YELLOW	18	WST P8-I42002K21B-B or EQUIV.	500 ⁺³⁰ ₋₁₀ mm		
	2	+12V	YELLOW	18				
	3	+12V	YELLOW	18				
	4	COM	BLACK	18				
	5	COM	BLACK	18				
	6	COM	BLACK	18				
	7	COM	BLACK	18				
	8	COM	BLACK	18				
P5	1	+12V	YELLOW	20	WST P8-I42002K21B-B or EQUIV.	155±10mm		
	2	+12V	YELLOW	20				
	3	+12V	YELLOW	20				
	4	COM	BLACK	20				
	5	COM	BLACK	20				
	6	COM	BLACK	20				
	7	COM	BLACK	20				
	8	COM	BLACK	20				
P6 P10	1	+3.3VDC	ORANGE	18	MOLEX SD-67582-001 or EQUIV.	400 ⁺³⁰ ₋₁₀ mm		
	2	COM	BLACK	18				
	3	+5VDC	RED	18				
	4	COM	BLACK	18				
	5	+12V	YELLOW	18				
P7 P11 P8 P12	1	+3.3VDC	ORANGE	18	MOLEX SD-67582-001 or EQUIV.	150±10mm		
	2	COM	BLACK	18				
	3	+5VDC	RED	18				
	4	COM	BLACK	18				
	5	+12V	YELLOW	18				
P9 P13	1	+12V	YELLOW	18	AMP 1-480424-0 or EQUIV.	150±10mm		
	2	COM	BLACK	18				
	3	COM	BLACK	18				
	4	+5VDC	RED	18				

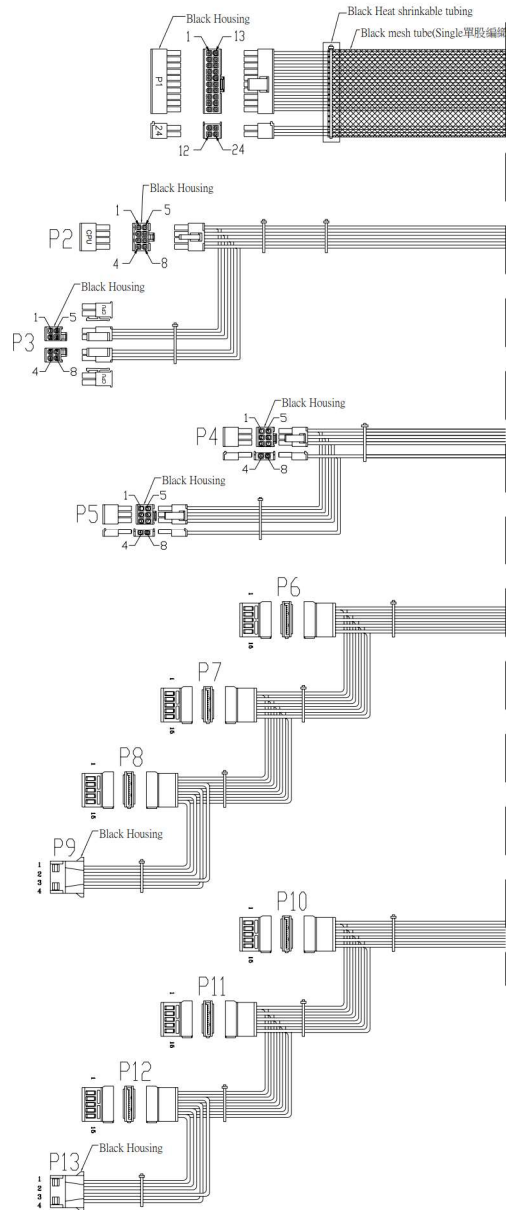

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. Label of origin is marked if indicated by sales.
 3. DIMENSIONAL TOLERANCES: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].
 4. Case with Black GF20269 coating(黑細沙紋烤漆).
 5. Cable used UL1007 cable.
 6. Color of SCREW,CONNECTOR: Black.
 7. FAN Guard is black coating.

P/N.:9PA550AP00

MODEL NO. :FSP550-50AEC		TITLE:ASSY	SHEET: 1 OF 1	REV:01
R&D 8	PE	DRAWN	DATE	
			JAN.19.2024	

UNIT:mm [inch]