
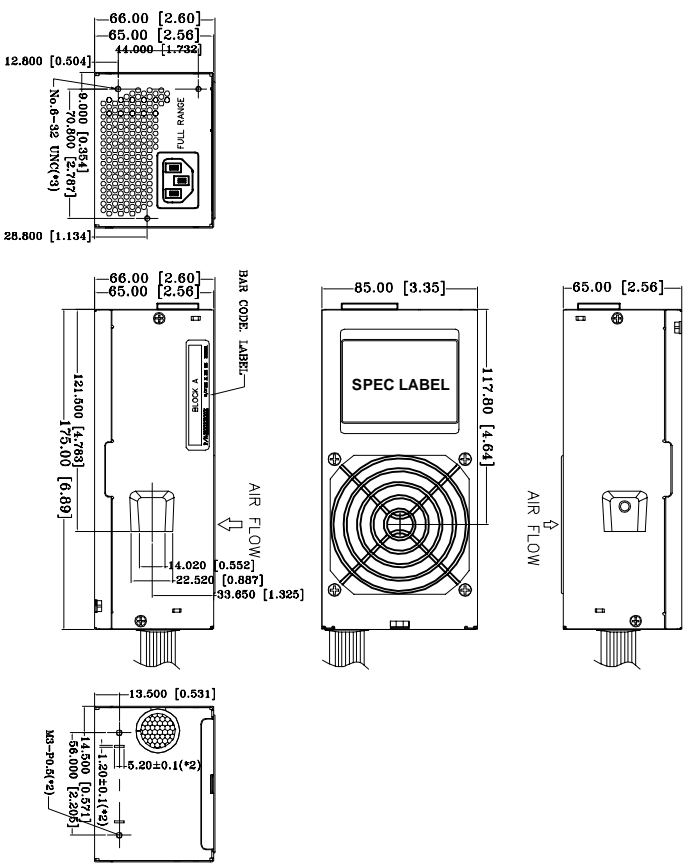


REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR	CABLE LENGTH
P1	1	+3.3VDC	BL.ACK	20	WST	350±8mm
	2	+3.3VDC	BL.ACK	20	P4-42002K110-8 or EQUIV.	
/24	3	+5VDC	BL.ACK	18		
	4	+5VDC	BL.ACK	18		
7	5	+5VDC	BL.ACK	20		
	6	+5VDC	BL.ACK	20		
8	7	BL.ACK	BL.ACK	18		
	8	BL.ACK	BL.ACK	24		
10	9	+12V	BL.ACK	20		
	10	+12V	BL.ACK	20		
12	11	+3.3VDC	BL.ACK	20		
	12	+3.3VDC	BL.ACK	20		
14	13	+12VDC	BL.ACK	24		
	14	+12VDC	BL.ACK	24		
16	15	PS_ON#	BL.ACK	18		
	16	PS_ON#	BL.ACK	24		
18	17	COM	BL.ACK	18		
	18	COM	BL.ACK	18		
19	19	COM	BL.ACK	18		
	19	COM	BL.ACK	18		
21	21	+5VDC	BL.ACK	20		
	22	+5VDC	BL.ACK	20		
23	23	+5VDC	BL.ACK	20		
	24	+5VDC	BL.ACK	18		
P2	1	COM	BL.ACK	20	MOLEX	350±8mm
	2	+12V	BL.ACK	20		
P3	1	COM	BL.ACK	20	MOLEX	300±8mm
	2	+5VDC	BL.ACK	20		
P4	1	+12V	BL.ACK	20		150±10mm
	2	COM	BL.ACK	20		
P5	1	+5VDC	BL.ACK	20	MOLEX	150±10mm
	2	+5VDC	BL.ACK	20		
P6	1	+12V	BL.ACK	20	AMP	300±8mm
	2	COM	BL.ACK	20		
P7	1	+12V	BL.ACK	20	AMP	150±10mm
	2	COM	BL.ACK	20		
P8	1	+5VDC	BL.ACK	22	AMP	150±10mm
	2	COM	BL.ACK	22		
P9	1	+12V	BL.ACK	22	WST	400±8mm
	2	+12V	BL.ACK	20		
4	3	COM	BL.ACK	20		
	4	COM	BL.ACK	20		
5	5	COM	BL.ACK	20		
	6	COM	BL.ACK	20		
7	7	COM	BL.ACK	20		
	8	COM	BL.ACK	20		

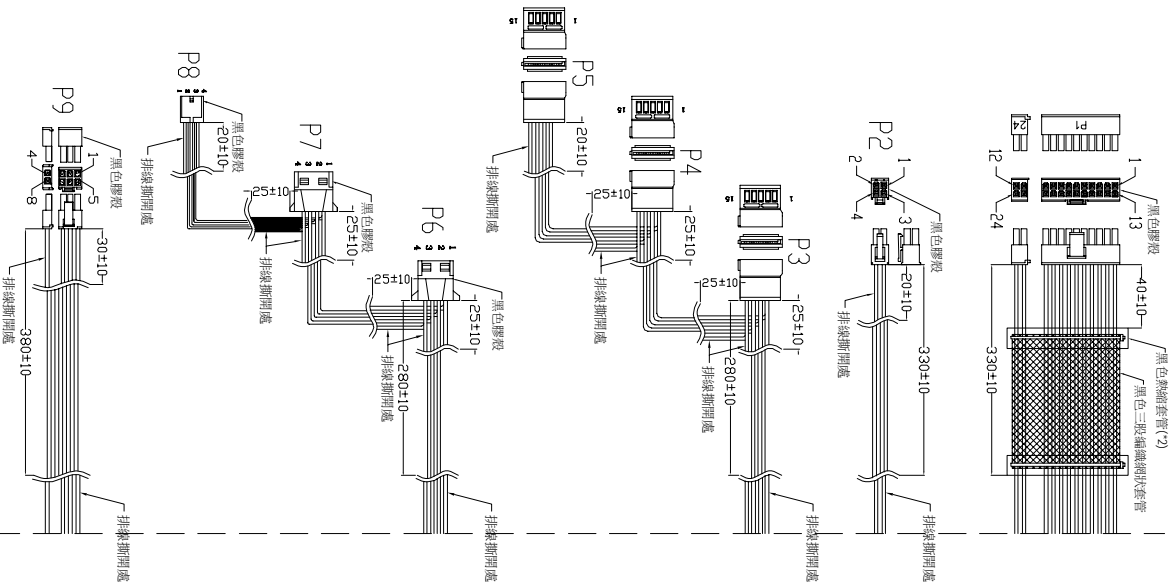

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
  2. 產地標籤依業務指示加貼.
  3. 公差: XX=±0.5 [0.02]、XXX=±0.25 [0.01].
  4. 線材P1為UL1007黑色線;其他為UL2468黑色排線.
  5. 風扇網為黑色,CASE及風扇固定螺絲均為黑色螺絲.
  6. 黑色亮面砂漆"處理, 油墨編碼 LC13-0509

P/N.:9PA300HK00

MODEL NO.:TFX3B-300W (L290001).

TITLE: ASSY

R&D(8)

PE

DRAWN

DATE

JAN.17.2020

SHEET: 1 OF 1

REV:01

UNIT:mm [inch]

