

Pin assignment of IN1

| Pin No. | Function | Wafer |
|---------|----------|---------------|
| 1 | N | JST B2P3-VH |
| 2 | | or EQUIVALENT |
| 3 | L | |


Pin assignment of CN200

| Pin No. | Function | Wafer |
|---------|----------|---------------|
| 1 | +24V | JST B6P-VH |
| 2 | +24V | or EQUIVALENT |
| 3 | +24V | |
| 4 | GND | |
| 5 | GND | |
| 6 | GND | |

Pin assignment of CN201

| Pin No. | Function | Wafer |
|---------|----------|------------------|
| 1 | +12V | MOLEX 22-27-2021 |
| 2 | GND | or EQUIVALENT |

備註：產地標籤依業務指示加貼。

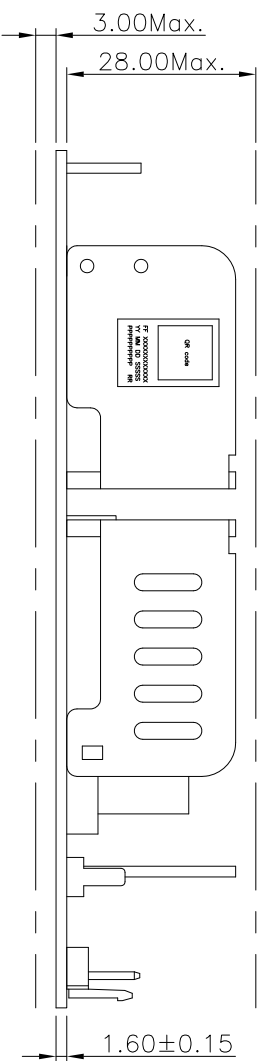


SCALE:
UNIT: mm

P/N.: 90C200AJ00

DIMENSIONAL TOLERANCES

| (V) | () | () | () | () |
|-----------|-------|----------|-----------------|-----------------|
| <30 | ±0.25 | DECIMALS | UP~100 : ±0.2 | 250~300 : ±0.4 |
| >30~100 | ±0.35 | X | 100~150 : ±0.25 | 300~350 : ±0.45 |
| >100~300 | ±0.5 | XX | 150~200 : ±0.3 | 350~OVER : ±0.5 |
| ABOVE 300 | ±0.6 | X,XX | 200~250 : ±0.35 | 900~OVER : ±3.1 |

HOLES : ±0.2 ANGLES : ±0.5°



| MODEL NO. : | FSP200-P35-B24 | TITLE: | ASSY |
|-----------------------|----------------|--------|---------------|
| R&D | P E | DRAWN | DATE |
| INTERIOR COUNTERSIGN: | | | JUL.07.2022 |
| | | | SHEET: 1 OF 1 |
| | | | REV: 01 |