



REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1 /24	1	+3.3VDC	ORANGE	18	WST P20-I42002K110-B +P4-I42002K110-B or EQUIV.	550±30mm
	2	+3.3VDC	ORANGE	18		
	3	COM	BLACK	18		
	4	+5VDC	RED	18		
	5	COM	BLACK	18		
	6	+5VDC	RED	18		
	7	COM	BLACK	18		
	8	PW_OK	GRAY	24		
	9	+5Vsb	PURPLE	20		
	10	+12V	YELLOW	18		
	11	+12V	YELLOW	18		
	12	+3.3VDC	ORANGE	18		
	13	+3.3VDC	ORANGE	18		
	14	+3.3V Sense	BROWN	24		
	15	+12VDC	BLUE	24		
	16	COM	BLACK	18		
	17	PS_ON#	GREEN	24		
	18	COM	BLACK	18		
	19	COM	BLACK	18		
	20					
	21	+5VDC	RED	18		
	22	+5VDC	RED	18		
	23	+5V Sense	RED	24		
	24	+5VDC	RED	18		
P2	1	COM	BLACK	18	MOLEX 39-01-2080 or EQUIV.	600±10mm
	2	COM	BLACK	18		
	3	COM	BLACK	18		
	4	COM	BLACK	18		
	5	+12V	YELLOW	18		
	6	+12V	YELLOW	18		
	7	+12V	YELLOW	18		
	8	+12V	YELLOW	18		
P3	1	COM	BLACK	20	WST P4-I42002BK3B + P4-I42002BK4B or EQUIV.	150±10mm
	2	COM	BLACK	20		
	3	COM	BLACK	20		
	4	COM	BLACK	20		
	5	+12V	YELLOW	20		
	6	+12V	YELLOW	20		
	7	+12V	YELLOW	20		
	8	+12V	YELLOW	20		
P4	1	+12V	YELLOW	18	WST P8-I42002K21B-B or EQUIV.	500±10mm
	2	+12V	YELLOW	18		
	3	+12V	YELLOW	18		
	4	COM	BLACK	18		
	5	COM	BLACK	18		
	6	COM	BLACK	18		
	7	COM	BLACK	18		
	8	COM	BLACK	18		
P5	1	+12V	YELLOW	20	WST P8-I42002K21B-B or EQUIV.	155±10mm
	2	+12V	YELLOW	20		
	3	+12V	YELLOW	20		
	4	COM	BLACK	20		
	5	COM	BLACK	20		
	6	COM	BLACK	20		
	7	COM	BLACK	20		
	8	COM	BLACK	20		
P7	1	+3.3VDC	ORANGE	18	MOLEX SD-67926-0011 or EQUIV.	500±10mm
	2	COM	BLACK	18		
	3	+5VDC	RED	18		
	4	COM	BLACK	18		
	5	+12V	YELLOW	18		
P8	1	+3.3VDC	ORANGE	18	MOLEX SD-67926-0011 or EQUIV.	50±10mm
P9	2	COM	BLACK	18		
P10	3	+5VDC	RED	18		
P11	4	COM	BLACK	18	MOLEX SD-67582-001 or EQUIV.	500±10mm
	5	+12V	YELLOW	18		
	1	+3.3VDC	ORANGE	18		
	2	COM	BLACK	18		
	3	+5VDC	RED	18		
P12	4	COM	BLACK	18	MOLEX SD-67582-001 or EQUIV.	155±10mm
P13	5	+12V	YELLOW	18		
P14	1	+3.3VDC	ORANGE	18		
P15	2	COM	BLACK	18	AMP 1-480424-0 or EQUIV.	500±10mm
	3	+5VDC	RED	18		
	4	COM	BLACK	18		
	5	+12V	YELLOW	18		
P16	1	+12V	YELLOW	18	AMP 1-480424-0 or EQUIV.	155±10mm
	2	COM	BLACK	18		
	3	+5VDC	RED	18		
	4	COM	BLACK	18		
P17	1	+5VDC	RED	20	AMP 171822-4 or EQUIV.	155±10mm
	2	COM	BLACK	20		
	3	+5VDC	RED	20		
	4	+12V	YELLOW	20		

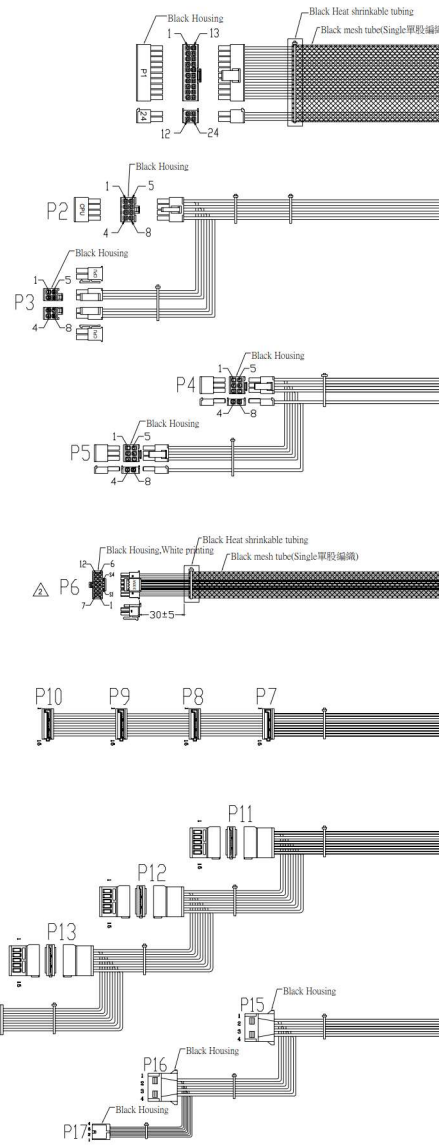

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P6	1	+12V	BLACK	18	WST PD12-I30006F54Z-B	650±10mm
	2	+12V	BLACK	18		
	3	+12V	BLACK	18		
	4	+12V	BLACK	18		
	5	+12V	BLACK	18		
	6	+12V	BLACK	18		
	7	COM	BLACK	18		
	8	COM	BLACK	18		
	9	COM	BLACK	18		
	10	COM	BLACK	18		
	11	COM	BLACK	18		
	12	COM	BLACK	18		
	S1	CARD_PWR	BLACK	28		
	S2	CARD_CSL	BLACK	28		
	S3	SENSE0	BLACK	28		
	S4	SENSE1	BLACK	28		

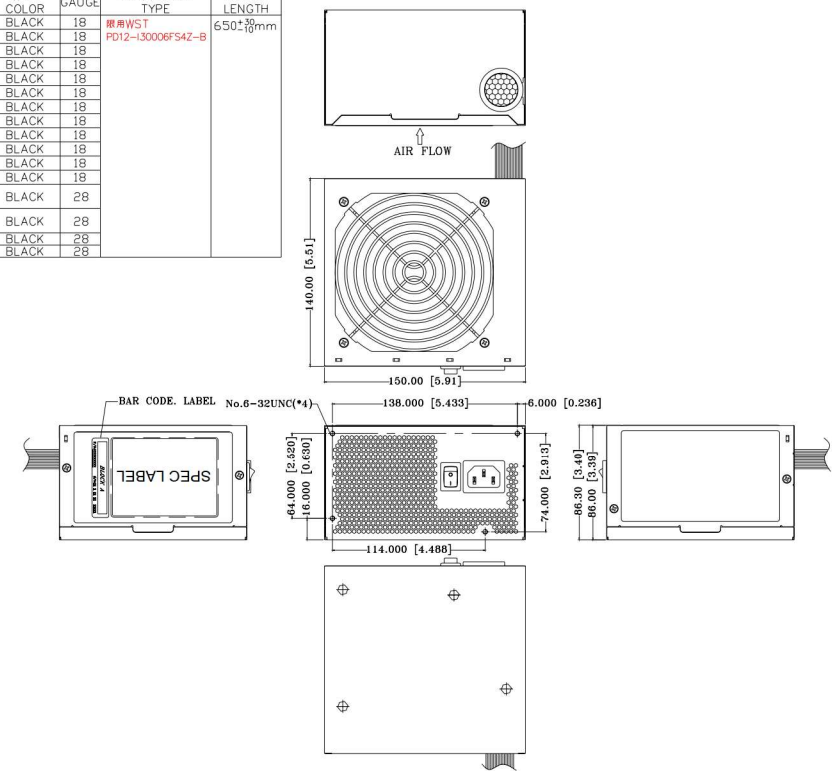

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. Label of origin is marked if indicated by sales.
 3. DIMENSIONAL TOLERANCES: .XX=±0.5 [0.02] 、.XXX=±0.25 [0.01].
 - △ 4. Cable used UL1007 black cable(P1~P5 、P6-S1~P6-S4 、P7~P17)
Cable used SOFT軟線 UL1569 black cable(P6-1~P6-12)

P/N.:9PA7508101

MODEL NO. :FSP750-51AAC,GEN5,(STD0002)	TITLE:ASSY	SHEET: 1 OF 1	REV:02
R&D 8	PE	DRAWN	DATE
			JUN.05.2023

UNIT:mm [inch]