
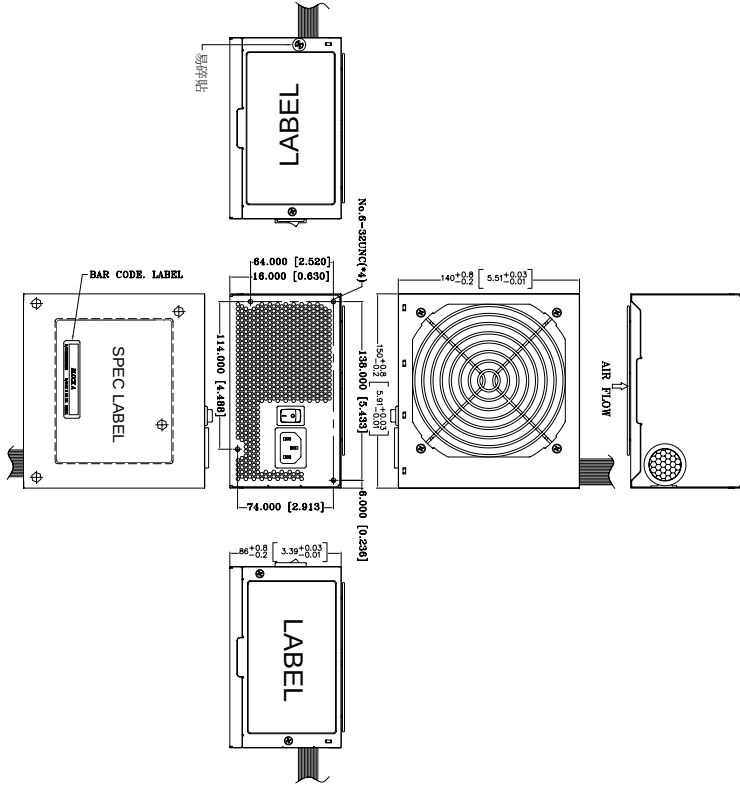


REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE	CABLE LENGTH
P1 /24	1	+3.3VDC	BLACK	18	WST	550±10mm
	2	+3.3VDC	BLACK	18	P20-142002K11D-B	
	3	COM	BLACK	18	P4-142002K11D-B or EQUIV.	
	4	+5VDC	BLACK	18		
	5	COM	BLACK	18		
	6	+5VDC	BLACK	18		
	7	COM	BLACK	18		
	8	PW. OK	BLACK	24		
P2	9	+5VSB	BLACK	20		600 ±10mm
	10	+12V	BLACK	18		
	11	+12V	BLACK	18		
	12	+3.3VDC	BLACK	18		
	13	+3.3VDCsense	BLACK	24		
	14	-12VDC	BLACK	24		
	15	COM	BLACK	18		
	16	PS-ON#	BLACK	24		
	17	COM	BLACK	18		
	18	COM	BLACK	18		
	19	COM	BLACK	18		
	20	+5VDC	BLACK	18		
P3	21	+5VDC	BLACK	18		155±10mm
	22	+5VDC	BLACK	18		
	23	+5VDC	BLACK	18		
	24	COM	BLACK	18		
P4	1	COM	BLACK	18	MOLEX	500 ±10mm
	2	COM	BLACK	18	39-01-2080 or EQUIV.	
	3	COM	BLACK	18		
	4	COM	BLACK	18		
	5	+12V	BLACK	18		
	6	+12V	BLACK	20		
	7	+12V	BLACK	20		
	8	+12V	BLACK	20		
P5	1	COM	BLACK	18	MOLEX	155±10mm
	2	COM	BLACK	18	SD-67926-0011 or EQUIV.	
	3	+5VDC	BLACK	18		
	4	COM	BLACK	18		
P6	1	+12V	BLACK	18	AMP	155±10mm
	2	COM	BLACK	18	-480424-0 or EQUIV.	
	3	COM	BLACK	18		
	4	+5VDC	BLACK	18		
P7	1	+3.3VDC	BLACK	18	MOLEX	500 ±10mm
	2	COM	BLACK	18	SD-67582-001 or EQUIV.	
	3	+5VDC	BLACK	18		
	4	COM	BLACK	18		
P8	1	+3.3VDC	BLACK	18	MOLEX	155±10mm
	2	COM	BLACK	18	SD-67582-001 or EQUIV.	
	3	+5VDC	BLACK	18		
	4	COM	BLACK	18		
P9	1	+3.3VDC	BLACK	18	MOLEX	155±10mm
	2	COM	BLACK	18	SD-67582-001 or EQUIV.	
	3	+5VDC	BLACK	18		
	4	COM	BLACK	18		
P10	1	+12V	BLACK	18	WST	500 ±10mm
	2	+12V	BLACK	18	P8-142002K21B-B or EQUIV.	
	3	+12V	BLACK	18		
	4	COM	BLACK	18		
P11	1	+12V	BLACK	18	WST	500 ±10mm
	2	+12V	BLACK	18	P8-142002K21B-B or EQUIV.	
	3	+12V	BLACK	18		
	4	COM	BLACK	18		
P12	1	+12V	BLACK	18	WST	500 ±10mm
	2	+12V	BLACK	18	P8-142002K21B-B or EQUIV.	
	3	+12V	BLACK	18		
	4	COM	BLACK	18		
P13	1	+12V	BLACK	18	WST	155±10mm
	2	+12V	BLACK	50	P8-142002K21B-B or EQUIV.	
	3	+12V	BLACK	20		
	4	COM	BLACK	20		
	5	COM	BLACK	20		
	6	COM	BLACK	20		
	7	COM	BLACK	20		
	8	COM	BLACK	20		

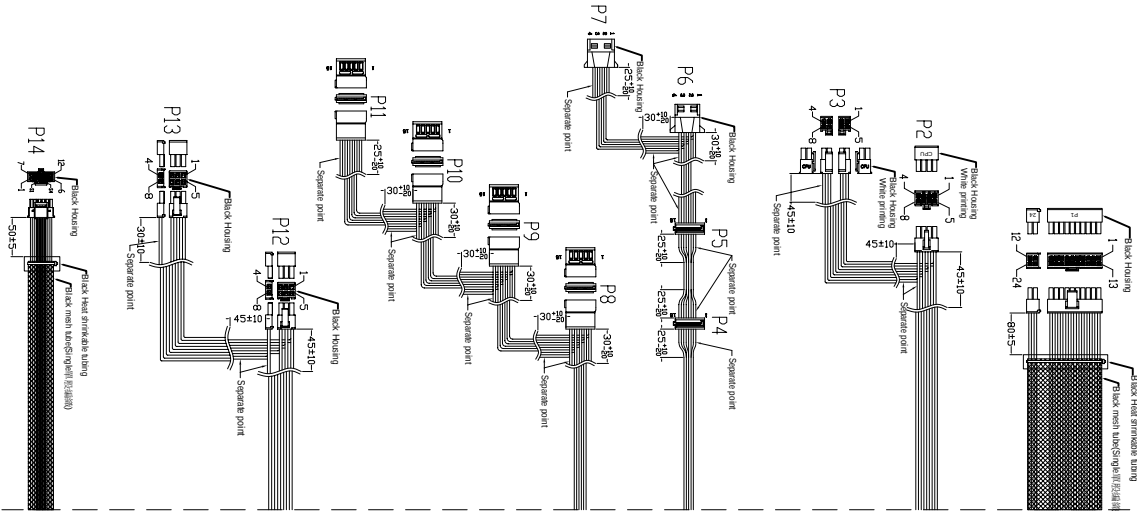

P14	1	+12V	BLACK	16	33+WST	650±10mm
	2	+12V	BLACK	16	PD12-13000F542-B	
	3	+12V	BLACK	16		
	4	+12V	BLACK	16		
	5	+12V	BLACK	16		
	6	+12V	BLACK	16		
	7	COM	BLACK	16		
	8	COM	BLACK	16		
	9	COM	BLACK	16		
	10	COM	BLACK	16		
	11	COM	BLACK	16		
	12	COM	BLACK	16		
	13	COM	BLACK	16		
	14	COM	BLACK	16		
	15	COM	BLACK	16		
	16	COM	BLACK	16		

- NOTES:
1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
 2. Label of origin is marked if indicated by sales.
 3. DIMENSIONAL TOLERANCES: .XX=±0.5 [0.02] , .XXX=±0.25 [0.01].
 4. Case with Black GR-20269 coating(黑鍍20269鍍層).
 5. Cable used UL1007 black cable(P1、P14-S1~P14-S4)
 6. Cable used SOFT軟線80P UL2468 black cable(P2~P13)
 7. Color of SCREW/CONNECTOR: Black.
 8. Color of SCREW/CONNECTOR: Black.
 9. Color of SCREW/CONNECTOR: Black.
 10. Color of SCREW/CONNECTOR: Black.
 11. Color of SCREW/CONNECTOR: Black.
 12. Color of SCREW/CONNECTOR: Black.
 13. Color of SCREW/CONNECTOR: Black.
 14. Color of SCREW/CONNECTOR: Black.
 15. Color of SCREW/CONNECTOR: Black.
 16. Color of SCREW/CONNECTOR: Black.

UNIT:mm [inch]

MODEL NO. : FSP850-50AEC, 9PA8507809 (STD0001)	TITLE: ASSY	SHEET: 1 OF 1	REV: 01
R&D 8	PE	DRAWN	DATE
			OCT.29.2024

P/N.: PPA8504900