

DESCRIPTION

FSP280-60LB(24V) is an industrial level of switching power supply. The power supply comes to offer the total power capacity up to 280 Watts, and uses unique active PFC (Power Factor Correction) circuit design with its high-load electrical components, makes it to be perfectly used in an industrial environment. In addition, with its full range of input and output electrical features, the power supply is ideally the best choice for server, workstation, communication or any other automation applications to use. The product also complies with the latest safety and EMC standards, which is perfectly to meet various regulations worldwide.



APPLICATION

For standard, advanced server, communication and industrial power system.

FEATURES

- ▣ Low Ripple & Noise
- ▣ Output over voltage protection
- ▣ Short circuit protection on all outputs
- ▣ Resettable power shut down
- ▣ 100% burn-in under high ambient temperature(50°C)
- ▣ Vacuum-impregnated transformer
- ▣ MTBF:100K hours at 25°C
- ▣ 100% Hi-pot tested
- ▣ Line input fuse protection

WATTAGE

Wattage: 280W

DIMENSION

Dimension: 190mm(L) x 81.5mm(W) x 40.5mm(H)

PRODUCT HIGHLIGHT

Efficiency Level: NON-80PLUS
Altitude: 2000M
PMBus: For standard, advanced server, communication and industrial power system.

INPUT SPECIFICATION

Input Range: 90-264 Vac
Input Frequency: 47-63 Hz
Input Current: 115V@ 5.0 Amps-rms maximum
 230V@ 2.5 Amps-rms maximum

GENERAL SPECIFICATION

Efficiency: 75%
Voltage Regulation: +3.3V, +12V, +5V, +5SB: ±5%
 -12V: ±10%
 +24V: -5%+7%


*Output Voltage and Current Rating

	+3.3V	+5V	+12V1	-12V	+24V	+5Vsb
Ripple-Noise(R-P) mV	50mV	50mV	120mV	120mV	200mV	50mV
Regulation Load %	±5%	±5%	±5%	±10%	±7%	±5%
Output Max.(A)	5A	1.6A	1.2A	0.3A	2.3A	2.5A
Output Min.(A)	0.5A	0.3A	1A	0A	0.1A	0A

NOTES

- ▣ 5V, 3.3V, 12V, -12V Will gave the regulation to 10% when all load take off.
- ▣ The +3.3V and +5V total output shall not exceed 85 watts.
- ▣ The total output shall not exceed 280 watts

MECHANICAL SPECIFICATION

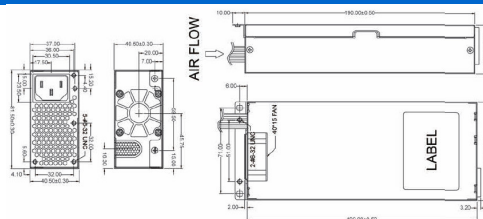

SAFETY STANDARD APPAOVAL



OUTPUT SPECIFICATION

Hold up Time: 115V/60Hz 17mSec.
 Minimum@100% Load,
 230V/50Hz 17mSec.
 Minimum,@100% Load
Output Voltage Regulation: +3.3Vdc output : +3.75 Vdc minimum, + 4.8Vdc maximum
 +5Vdc output : +5.5 Vdc minimum, + 7Vdc maximum
 +5Vsb output : +5.5 Vdc minimum, + 7.5Vdc maximum
 +12Vdc output : +13.2 Vdc minimum, + 15.6Vdc maximum
Output Rise Time: 115V-rms/230V-rms 5V 20ms Maximum
 115V-rms/230V-rms 12V 20ms Maximum
Ripple & Noise: 3.3V:50mV p-p
 5V:50mV p-p
 12V1:120mV p-p
 -12V:200mV p-p
 5Vsb:50mV p-p
 24V:200mV p-p
Short Circuit Protection: load < 0.1 Ohm

ENVIRONMENTAL SPECIFICATION

TEMP.Range: Storage Temperature: -40°C to + 80°C
MTBF: The power supply have a minimum predicted MTBF(MIL-HDBK-217) of 100,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC inout voltage