




AIR FLOW

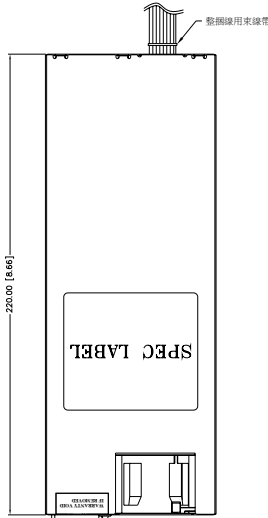

AIR FLOW

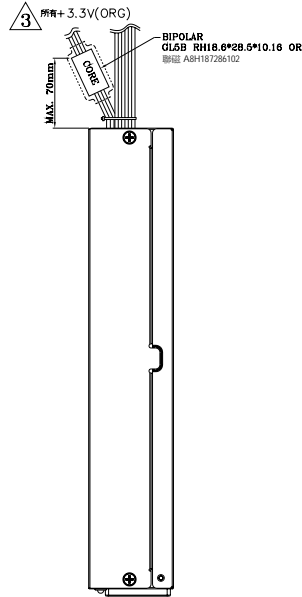

AIR FLOW




序號	修改版次	修改事項	備註
1	③	改善供應商作業，CORE 固定方式由束帶改繞單條線	
2	④	修改SATA 線徑由18改20AWG，改善工廠組裝困難易將線材刮傷。	

NOTE:

- ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
- 產地標籤依業務指示加貼。  
(Label of origin is marked if indicated by sales.)
- 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].

UNIT:mm [inch]

REF. ID	PIN NO.	RATING	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE	CABLE LENGTH		
P1	1	+3.3V	ORANGE	UL1007 18 AWG	MOLEX 39-01-2240 or EQUIV.	350±15 mm		
	2	+3.3V	ORANGE	UL1007 18 AWG				
	3	COM	BLACK	UL1007 18 AWG				
	4	+5V	RED	UL1007 18 AWG				
	5	COM	BLACK	UL1007 18 AWG				
	6	+5V	RED	UL1007 18 AWG				
	7	COM	BLACK	UL1007 18 AWG				
	8	PW_OK	GRAY	UL1007 24 AWG				
	9	+5VSB	PURPLE	UL1007 18 AWG				
	10	+12V	YELLOW	UL1007 18 AWG				
	11	+12V	YELLOW	UL1007 18 AWG				
	12	+3.3V	ORANGE	UL1007 18 AWG				
	13	+3.3V	ORANGE	UL1007 18 AWG				
	14	+3.3V sense	BROWN	UL1007 24 AWG				
	15	-12V	BLUE	UL1007 24 AWG				
	16	COM	BLACK	UL1007 18 AWG				
	17	PS_ON#	GREEN	UL1007 24 AWG				
	18	COM	BLACK	UL1007 18 AWG				
	19	COM	BLACK	UL1007 18 AWG				
	20							
	21	+5V	RED	UL1007 18 AWG			WST P4-142002BK3B+ P4-142002BK4B or EQUIV.	350±15 mm
	22	+5V	RED	UL1007 18 AWG				
	23	+5V	RED	UL1007 18 AWG				
	24	COM	BLACK	UL1007 18 AWG				
P2	1	COM	BLACK	UL1007 18 AWG	WST P4-142002K3B+ P4-142002K4B or EQUIV.	350±15 mm		
	2	COM	BLACK	UL1007 18 AWG				
	3	COM	BLACK	UL1007 18 AWG				
	4	COM	BLACK	UL1007 18 AWG				
	5	+12V	YELLOW	UL1007 18 AWG				
	6	+12V	YELLOW	UL1007 18 AWG				
	7	+12V	YELLOW	UL1007 18 AWG				
	8	+12V	YELLOW	UL1007 18 AWG				
P3	1	COM	BLACK	UL1007 18 AWG	WST P4-142002K3B+ P4-142002K4B or EQUIV.	350±15 mm		
	2	COM	BLACK	UL1007 18 AWG				
	3	COM	BLACK	UL1007 18 AWG				
	4	COM	BLACK	UL1007 18 AWG				
	5	+12V	YELLOW	UL1007 18 AWG				
	6	+12V	YELLOW	UL1007 18 AWG				
	7	+12V	YELLOW	UL1007 18 AWG				
	8	+12V	YELLOW	UL1007 18 AWG				
P4	1	+12V	YELLOW	UL1007 18 AWG	WST P8-142002K21B-B or EQUIV.	350±15 mm		
	2	+12V	YELLOW	UL1007 18 AWG				
	3	+12V	YELLOW	UL1007 18 AWG				
	4	COM	BLACK	UL1007 18 AWG				
	5	COM	BLACK	UL1007 18 AWG				
	6	COM	BLACK	UL1007 18 AWG				
	7	COM	BLACK	UL1007 18 AWG				
	8	COM	BLACK	UL1007 18 AWG				
P5	1	+3.3V	ORANGE	UL1007 20 AWG	MOLEX SD-67582-001 or EQUIV.	350±15 mm		
	2	COM	BLACK	UL1007 20 AWG				
	3	+5V	RED	UL1007 20 AWG				
	4	COM	BLACK	UL1007 20 AWG				
	5	+12V	YELLOW	UL1007 20 AWG				
P6	1	+3.3V	ORANGE	UL1007 20 AWG	MOLEX SD-67582-001 or EQUIV.	155±15 mm		
	2	COM	BLACK	UL1007 20 AWG				
	3	+5V	RED	UL1007 20 AWG				
	4	COM	BLACK	UL1007 20 AWG				
	5	+12V	YELLOW	UL1007 20 AWG				
PA	1	SCL	BLUE	UL1007 24 AWG	MOLEX 60-57-8406 or EQUIV.	350±15 mm		
	2	SDA	PURPLE	UL1007 24 AWG				
	3	PSALERT	GREEN	UL1007 24 AWG				
	4	COM	BLACK	UL1007 24 AWG				
	5							

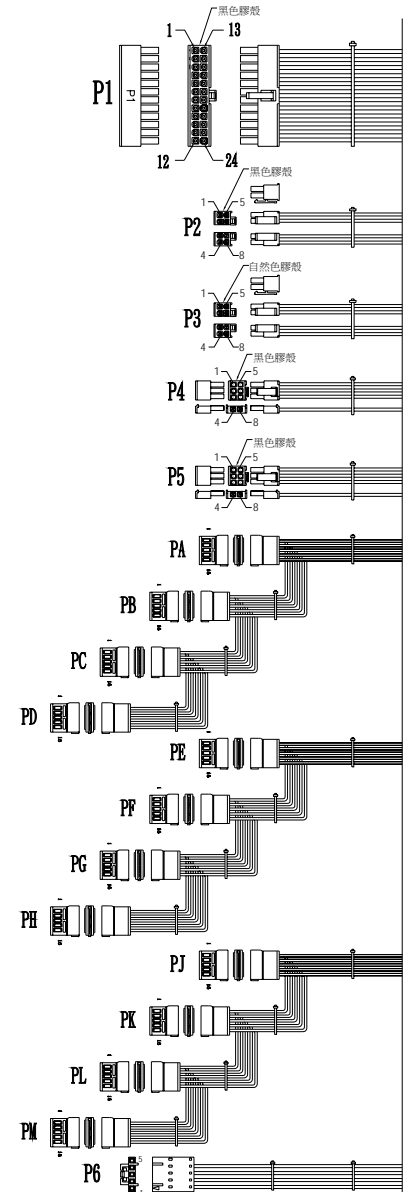

P/N.: 9PA8503400

MODEL NO. : FSP850-50FGPH3		TITLE: ASSY	SHEET: 1 OF 1	REV:04
R&D(TD)	PE	DRAWN	DATE	
		Patty	2019-12-05	
INTERIOR COUNTERSIGN:				