
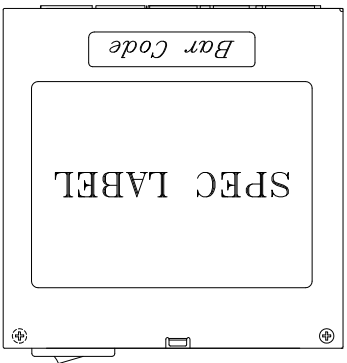



REV	DATE	DESCRIPTION	DRAWN
2	AUG.19,2025	變更線材&螺絲孔位置&風扇網	周書宇

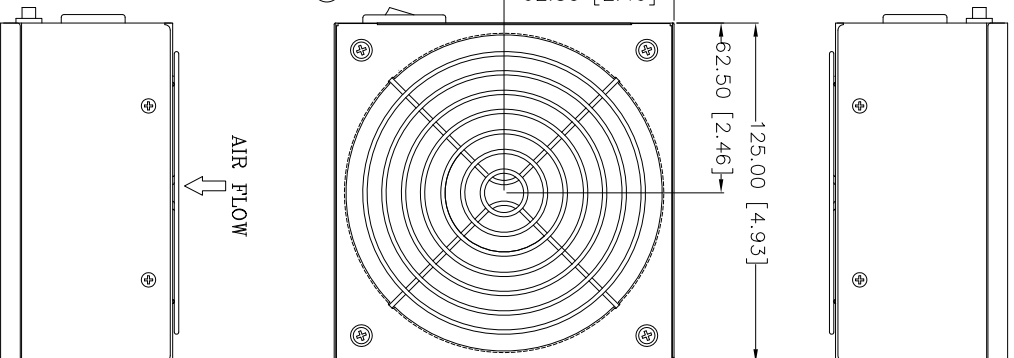








NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: $.XX=\pm 0.5$ [0.02]、 $.XXX=\pm 0.25$ [0.01]

UNIT:mm

P/N.:9PA12A3700			
MODEL NO. : FSP1200-57SFB(STD0001)		TITLE: ASSY	
R&D(z)		PE	DRAWN
			周書宇
INTERIOR COUNTERSIGN:			AUG.19.2025

P/N.:9PA12A3700

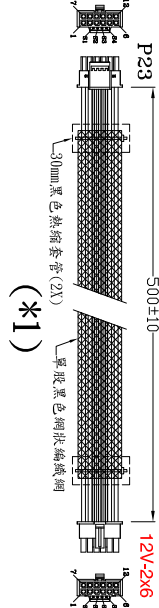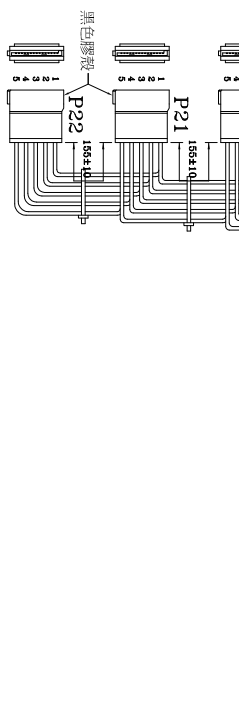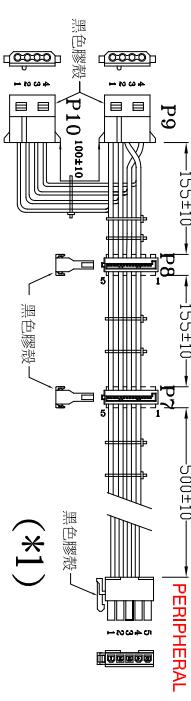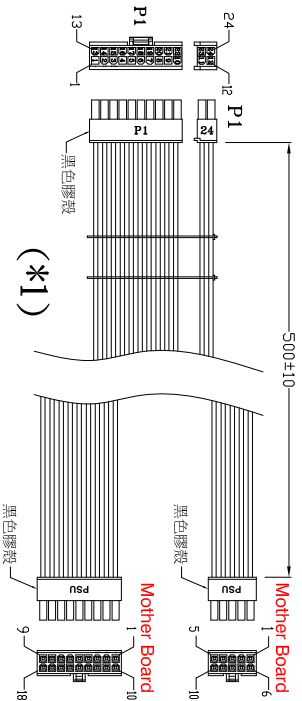

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE
P7 P8	1				MOLEX SD-67926 -0011 or EQUIV.
	2	COM	BLACK	18	
	3	+5V	RED	18	
	4	COM	BLACK	18	
	5	+12V	YELLOW	18	
P9 P10	1	+12V	YELLOW	18	AMP 1-480424-9 or EQUIV.
	2	COM	BLACK	18	
	3	COM	BLACK	18	
	4	+5V	RED	18	
	5	+3.3VDC	ORAGNE	18	
P19 P22	1	+3.3VDC	ORAGNE	18	MOLEX SD-67582 -001 or EQUIV.
	2	COM	BLACK	18	
	3	+5V	RED	18	
	4	COM	BLACK	18	
	5	+12V	YELLOW	18	
P23	1	+12V	BLACK	16	WST PD12- 130006FS4Z -B or EQUIV.
	2	+12V	BLACK	16	
	3	+12V	BLACK	16	
	4	+12V	BLACK	16	
	5	+12V	BLACK	16	
	6	+12V	BLACK	16	
	7	COM	BLACK	16	
	8	COM	BLACK	16	
	9	COM	BLACK	16	
	10	COM	BLACK	16	
P22	1	CARD_PWR_STABLE	BLACK	24	S4 SENSE1
	2	CARD_Ctrl_PRES#	BLACK	24	
	3	SENSE0	BLACK	24	
	4	SENSE1	BLACK	24	

REF. ID.	PIN NO.	SIGNAL	WIRE COLOR	GAUGE	CONNECTOR TYPE
P1	1	+3.3VDC	ORANGE	16	WST P20- 142002K11D-B + P4- 142002K13B-B or EQUIV.
	2	+3.3VDC	ORANGE	16	
	3	COM	BLACK	16	
	4	+5V	RED	16	
	5	COM	BLACK	16	
	6	+5V	RED	16	
	7	COM	BLACK	16	
	8	PW-OK	GRAY	22	
	9	+5Vsb	PURPLE	16	
	10	+12V	YELLOW	22	
P2	1	+12V	YELLOW	16	WST P6- 142002K21-B6 +P2- 142002K13B-B or EQUIV.
	2	+3.3VDC	ORANGE	16	
	3	+3.3VDC	ORANGE	16	
	4	+3.3VDC	BROWN	22	
	5	+3.3VDC	BLUE	22	
	6	PS-ON	GREEN	22	
	7	COM	BLACK	16	
	8	COM	BLACK	16	
	9	COM	BLACK	16	
	10	COM	BLACK	16	
P3	1	COM	BLACK	16	WST P4- 142002K3B-B4 + P4- 142002K4B-B4 or EQUIV.
	2	COM	BLACK	16	
	3	COM	BLACK	16	
	4	COM	BLACK	16	
	5	+12V	YELLOW	16	
	6	+12V	YELLOW	16	
	7	+12V	YELLOW	16	
	8	+12V	YELLOW	16	
	9	+12V	YELLOW	16	
	10	+12V	YELLOW	16	